





Novonivel® Access



Transition profile made of aluminum and designed to avoid discontinuities in the pavement. The profile has a wide and smoothed visible side with small grooved that favor the slide resistance. Delivered with countersunk holes to improve its fixing by using screws (not included). The inner part is reinforced to improve its load support. Available in anodized aluminum silver mat color with protective film.

General Features

| | |
|-------------|-------------------|
| Material: | Anodized aluminum |
| Length: | 2,5 m.l. |
| Dimensions: | h: 10 / 12 mm |
| | a: 60 mm |
| Finishes: | Matt silver |

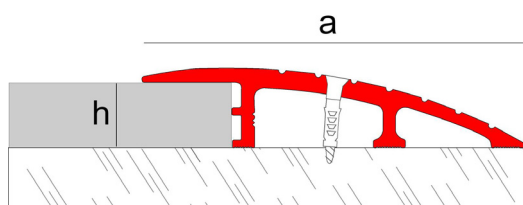

Applications



Novonivel® Access is a ramp profile to avoid discontinuities between different floorings. This profile is reinforced on the rear, so is able to support traffic of loads. To be installed with screws to improve the fixing.

This profile is perfect for rehabilitation or reform works as it is to be installed after finishing the work.

Technical Features

| | | |
|-----------------------|--------------------|------------|
| Alloy: | 6063 / T5 | |
| Stress test: | 110-130 MPa | EN 755-2 |
| Tensile strength: | 160-175 MPa | |
| Elongation (%) | 8% | |
| Fire resistance: | M0 (UNE 23-727-90) | |
| Abrasion resistance: | Very good | |
| Corrosion resistance: | Very good | |
| Appearance and color: | Excellent | EN 12373-1 |
| Anodizing: | Qualanod seal | |



Materials

Novonivel® Access is a profile made by extrusion of aluminium. These profiles have been anodized, improving mainly by this process their corrosion and mechanical resistance and their appearance.

The aluminium is a material with excellent chemical, physical and mechanical properties. It is lightweight, tough, ductile, malleable and highly durable.

Installation

Novonivel® Access is easy to install once the work is finished.

1. Clean the surface to install Novonivel® Access.
2. Place the profile into the desired location
3. Remove the protective film from the surface and pre-drill the position of the holes for the fixing screws
4. Remove the profile and drill the holes
5. Place again the profile and install it with the fixing screws (not supplied)

Cleaning and maintenance

The product must be cleaned periodically with a soft cleaner. If you use a neutral liquid cleaner, you must rinse the profile with cold water and dry it to remove the humidity excess.

Steel wool, abrasive cleaners, souring products as well as strong acids (hydrochloric and perchloric), strong bases (caustic soda or ammonia) or carbonated solutions are not recommended. Citric acid is neither recommended because dissolves the protective layer of the surface of aluminium. Waxes, petrolatum, lanolin or similar substances are not appropriate. Solvents containing haloalkanes (hydrofluoroether and chlorinated solvents) and curing accelerators containing chlorides should not be used (use special accelerators free of chlorides).

Technical information

You can find out more information about the technical features of the Emac®'s products by downloading its Technical Files in www.emac.es.

If you have any query, please contact our Technical Department in tecnico@emac.es.



Outdoors



Indoors



Floorings



Recyclable